


sizes • capacities

discharge setting "A"						
3/4"	7/8"	1"	1-1/4"	1-1/2"	2"	2-1/2"
35 35 40	40 45 50	45 50 55	50 60 70	60 75 80		
90 100	100 120	130 130	150 150	180 180		
140 150 155	155 160 170	170 180 200 210	185 200 220 230	220 270 280	340 350	
160 175 190	170 190 215	180 220 240 260	200 250 275 300	280 325 335	385 395	
225	250 285	285 320 330	325 370 390	360 420 460 475	460 500 525	700 750
420	450	550 670	680 800 870	800 890 930 970	1100 1200 1300	1400 1500

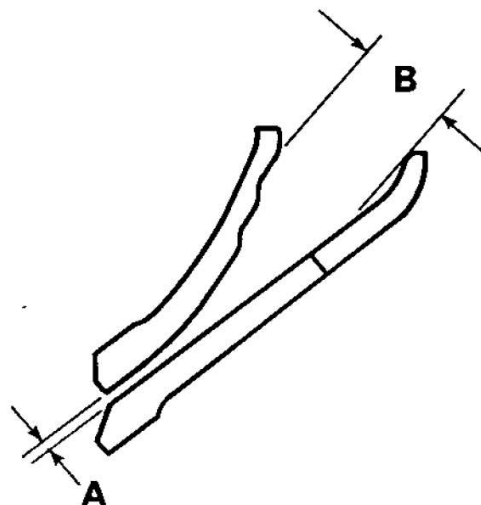

Note 1: Net finished product (screen undersize)
 Note 2: Tons per hour passing through the crusher
 (Net finished product plus recirculating load)

screen															
5/8"		3/4"		7/8"		1"		1-1/4"		1-1/2"		2"		2-1/2"	
for closed circuit operation															
1/2"		5/8"		3/4"		3/4"		7/8"		1"		1-1/4"		1-1/2"	
Note 1	Note 2	Note 1	Note 2	Note 1	Note 2	Note 1	Note 2	Note 1	Note 2	Note 1	Note 2	Note 1	Note 2	Note 1	Note 2
20	30	24	35	28	42	32	42	40	50	48	58				
20	30	24	35	28	42	32	42	40	50	48	58				
20	30	24	35	28	42	32	45	40	55	48	65				
45	75	60	90	70	105	80	105	95	120	120	150	145	170		
45	75	60	90	75	110	85	110	100	125	120	150	145	170		
				75	110										
70	105	85	125	100	150	120	155	130	160	165	200				
70	110	100	145	110	160	125	165	140	170	170	210	195	235		
				115	175	130	175	150	185	170	210	195	235		
					175		175		185						
95	135	105	155	125	185	145	190	175	220	205	205	235	280		
		120	175	135	200	155	205	190	235	215	260	250	295		
				140	210	165	215	190	245	220	270	250	295		
										225	275	260	310		
		160	235	180	265	210	270	240	300	300	360	330	390	400	465
								250	310	310	375	340	400	420	490
										315	380	350	410		