


product sizes • capacities

discharge setting "C"					
1/4"	3/8"	1/2"	5/8"	3/4"	1"
20 24	30 32	40 45	55		
60 80 65	75 75 80	100 100 105	110 125	140	
85	95 100	135 145 155 160	145 160 180 185	200 210	240
90 90	115 115 120	150 150 175	180 180 200	220 230	250 260
150 150	180 180 210	230 230 280 280	280 310 310	310 340 340	370 370
300	360 390	400 450 500	450 500 530 560	560 600 650	660 720

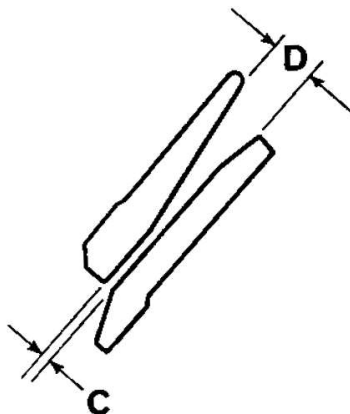

Note 1: Net finished product (screen undersize)

Note 2: Tons per hour passing through the crusher
(Net finished product plus recirculating load)

closed circuit screen											
1/4"		3/8"		1/2"		5/8"		3/4"		1"	
settings for closed circuit operation											
3/16"		1/4"		3/8"		1/2"		5/8"		3/4"	
Note 1	Note 2	Note 1	Note 2	Note 1	Note 2	Note 1	Note 2	Note 1	Note 2	Note 1	Note 2
13 13	20 20	15 18	23 27	25 26	32 35	30 35	45 50				
30 30	45 45	50 50 55	65 65 70	70 70 75	85 85 90	80 80 85	110 110 115	95 105	135 145	130	150
40	60	60	95	80 85	105 110	100 100 115	140 140 160	120 145 150	175 210 220	170	205
55	80	75 80	110 120	100 105 110	130 140 150	125 125 140	170 170 200	175 175	250 250	200 200	260 260
90	140	135 135	200 200	175 175 180	220 220 240	210 210 220 220	270 270 280 280	245 250 250	350 360 360	280 320 320	340 385 395
160	230	240	360	315 315	390 420	360 360 380	450 500 540	390 410 450 465	500 550 650 680	500 550 550	600 660 670